


WATER SUCTION & DISCHARGE HOSE 300PSI



Applications	For suction and discharge of water and other non-corrosive liquid.
Tube	Synthetic rubber
Reinforcement	High tensile synthetic fabric with steel helical embedded wire
Cover	Ozone and weather resistant synthetic rubber
Marking	JNTER WSD300 - WATER SUCTION & DISCHARGE HOSE - BP 900PSI - WP300PSI

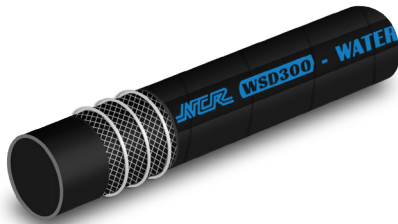


Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	M	
1.1/4	32	32.0	44.4	20	300	60	900	40	BS-51301
1.1/2	38	38.0	51.4	20	300	60	900	40	BS-51302
2	51	50.8	63.6	20	300	60	900	40	BS-51303
2.1/2	63	63.5	77.7	20	300	60	900	40	BS-51304
3	76	76.2	93.4	20	300	60	900	40	BS-51305
3.1/2	90	88.9	104.7	20	300	60	900	40	BS-51306
4	102	101.6	120.4	20	300	60	900	40	BS-51307
5	127	127.0	149.8	20	300	60	900	40	BS-51308
6	152	152.4	174.2	20	300	60	900	40	BS-51309

For sizes other than listed above, please contact us

FOLDABLE WATER DELIVERY HOSE



Applications	For discharge of water and other non-corrosive liquid. The hose can be flattened and coiled when it is not in-use.
Tube	Synthetic rubber
Reinforcement	High tensile polyester cord
Cover	High abrasion and weather resistant synthetic rubber
Marking	JNTER FWD150 FOLDABLE WATER DELIVERY HOSE BP 450PSI WP 150PSI

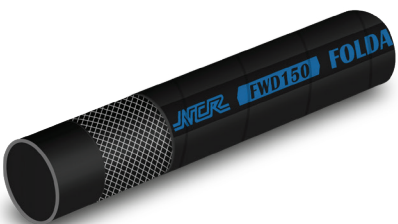

Nominal ID		ID	OD	WP		BP		L	Product code
Inch	mm	mm	mm	bar	PSI	bar	PSI	m	
2	51	50.8	58.4	10	150	30	450	40	BD-53001
3	76	76.2	83.8	10	150	30	450	40	BD-53002
4	101	101.6	109.0	10	150	30	450	40	BD-53003
6	152	152.4	163.0	10	150	30	450	40	BD-53004
8	203	203.2	217.0	10	150	30	450	20	BD-53005
10	254	254.0	268.0	10	150	30	450	20	BD-53006

*Flow direction of fluid is recommended to be in the same direction as indicated on the hose surface.

**Also available in 60 m lengths, please contact us.