


Tiflex Hose Oil Resistant WS type

*Oil Resistant WS Type is right-handed.


Hose



Example of Metal Fixture Fitting



Structure (Cross-Section View)

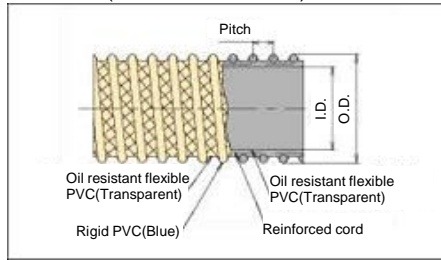

Features

- Using special material (soft part of the hose) excels in oil resistance.
- Lightweight, flexible, and easy to handle.
- Excels in tensile strength and pressure resistance due to reinforcement cord, and little elongation.
- Suited for delivery and suction use.

Sizes and properties (GL-□)

Nominal Dia. (φ)	I.D. (mm)	O.D. (mm)	Pitch (mm)	Working Pressure (20°C) MPa or less/ [kgf/cm ² or less]	Deformation Temp. (-0.1MPa/ -760mmHg) (°C)	Allowable Bending Radius (mm or more)	Ref. Weight (g/m)	Std. Length (m)
50	50.8±1.0	62.8	10.0	0.50 [05.1]	65	200	860	20, 50
65	63.5±1.0	78.0	14.3	0.50 [05.1]	60	250	1,230	
75	76.0±1.0	90.8	15.1	0.50 [05.1]	60	350	1,500	
100	101.6±1.5	119.0	16.5	0.50 [05.1]	60	500	2,350	
(125)	127.0±1.5	151.0	22.0	0.50 [05.1]	55	600	3,885	20

() is custom-made products.

Applications

- Vacuum hose for suction work vehicles such as waste liquid, waste oil, sludge, etc.

