

Silicone Rubber Cleaner Hose (Custom-made products.)

TSC type


Features

- Light weighted and flexible cleaner hose constructed of heat resistant fabric of polyester cloth coated with silicone rubber, silicone rubber, and reinforcing wire.
- Excels in heat and cold resistance. Continuously usable temperature is -50°C~150°C.

Applications

- Suited for suction exhaust gas of solvent and etc.

Hose

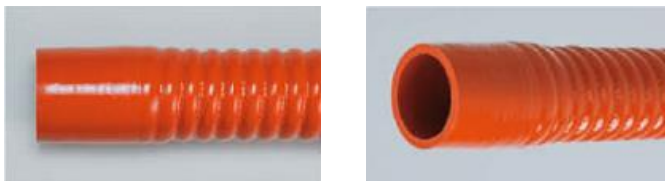

Structure (Cross-Section View)



Dimension and property (SRDH[TS]/[GS]-□)

Nominal Dia. (φ)	I.D. (mm)	O.D. (mm)	Pitch (mm)
25	25.0	(28.0)	10.0
38	38.0	(46.0)	10.0
50	50.0	(59.0)	12.0
65	65.0	(74.0)	13.0
75	75.0	(84.0)	14.0
76	76.3	(85.0)	14.0
90	90.0	(101.0)	14.0
100	100.0	(111.0)	14.0
101	101.3	(112.0)	14.0
125	126.5	(139.0)	15.0
140	139.5	(152.0)	17.0
150	150.0	(163.0)	17.0
165	165.0	(178.0)	19.0
175	178.0	(191.0)	22.0
200	203.0	(216.0)	22.0

These above mentioned values are not guaranteed, but standard ones.

These standards may change without prior notice.

Standard length is 2m. For a diameter or length other than those mentioned above, please consult us.

GSC type

Features

- Light weighted and flexible duct hose constructed of heat resistant fabric of glass cloth silicone rubber, silicone rubber, and reinforcing wire.
- Excels in heat and cold resistance. Continuously usable temperature is -50°C~200°C.

Applications

- Suited for suction exhaust gas of solvent and etc.
Suited for suction exhaust gas of solvent and etc.